

HMP-500S/505S



HD Network

Digital Signage Media Player

With Solid-state Storage Option



Highlights

- ♦ **Network-Managed Multi-zone Digital Signage Supporting RSS Feed**
- ♦ **Powerful schedule management features with included PC software**
- ♦ **Dedicated Non-PC Technology**
- ♦ **Plug-and-Play Ease of Use**
- ♦ **Reliable solid-state CF card storage (HMP-505S model only)**

Suitable for

- ♦ **Retail Branding / Merchandising**
- ♦ **Advertising Networks**
- ♦ **Electronic Menu Boards**
- ♦ **Airports & Train Stations**
- ♦ **Gas Stations**
- ♦ **Compliance Training**

The HMP-500S Network Digital Signage Media Player is a feature-rich, industrial-grade, solid-state (model HMP-505S) network-managed digital signage playback system.

Network-Managed Multi-Zone with RSS Feed

The HMP-500S features dynamic RSS feed capability working in conjunction with the optional Central Server. Advanced scripting control allows the user to conveniently partition the high-definition display into zones to mix video, graphics and text crawl. Over a local-area network, the built-in LAN-mode API allows the system integrator to control the media player using HTTP commands.

Dedicated Non-PC Technology

The HMP-500S features leading high-definition video decoding hardware technology and reliable solid-state storage for 24x7x365 operation cycles and minimal maintenance effort. Dedicated digital signage technology eliminates the risk of virus infection and operating system crash commonly found in PC-based solutions. Dedicated player technology provides dramatic energy savings – consuming just 4 watts compared to 100+ watts of typical PCs. The HMP-500S's dedicated technology lowers your operation costs while protecting the environment, yielding some of the lowest TCOs (total cost of ownership) among the industry.

Plug-and-Play Ease of Use

The compact form factor allows the HMP-500S to be installed in the smallest space available. When not connected to a network, using the media player is as simple as loading media files to the specified folder on a USB thumb drive and plugging the USB drive into the HMP-500S to update the player's internal storage. After the update, media files are copied into the HMP-500S for playback and the USB drive may then be removed. No extra handling is needed. This plug-and-play ease of use allows the untrained field-person to conveniently and reliably update digital signs at each location.

Technical Specification

POPAI Screen Media Standards Support

- S1 (JPEG 480p baseline)
- S2 (JPEG 720p baseline)
- S4 (MPEG L2 audio)
- S5 (MP3 audio, 384Kbps)
- S6 (MPEG-1 SIF, 3Mbps CBR)
- S7 (MPEG-1 480p, 10Mbps CBR)
- S8 (MPEG-1 720p, 15Mbps CBR)
- S9 (MPEG-2 480p, 6Mbps CBR)
- S10 (MPEG-2 720p, 12Mbps CBR)
- E1 (PNG 24bpp+alpha, 480p)
- E2 (PNG 24bpp+alpha, 720p)
- E4 (VC-1/WMV9, MP@ML, 720p)
- E7 (MPEG-4 ASP, 480p, 10Mbps CBR)

RSS Support

- RSS 1.0, 2.0 and ATOM
- Central Management Server (Optional)

Playback Control

- Alphabetical looping
- Playlist script control
- Central Management Server (Optional service subscription)

Content Management

- LAN - Foundations Software
- LAN/USB/CF - Manager Express
- WAN - Central Management Server (optional)
- USB media file update

Physical Connectors

- DVI-I (up to 1080i)
- VGA (with DVI-to-VGA adapter)
- Unamplified RCA audio L/R
- USB x 2

Local Storage

- 4GB Industrial Grade SLC CF Card (holds approx. 105 minutes of HD content)

Accessories

- DVI-to-VGA adapter
- RCA male-3.5mm female audio cable
- 3.5mm male-male audio cable
- Ethernet cable

Power

- Input: 12V @ 2A DC
- Consumption: typical 7W (HMP-500S) / 5W (HMP-505S)

Environmental

- Operating temperature: 0 to 40°C
- Humidity: 5 to 85% @ 40°C, non-condensing

Dimensions (WxDxH)

- 9.0" x 6.1" x 1.6" (230mm x 155mm x 40mm)

Weight

- Approx. 1.4kg (3lbs) (HMP-500S) / 1.14kg (2.5lbs) (HMP-505S)



Certifications

- CE/FCC
- RoHS
- IEC60068-2-64 Operating/ IEC60068-2-6 non-Operating Vibration Inspection Passed

Warranty

- 1-year limited parts & labor

Product Photos

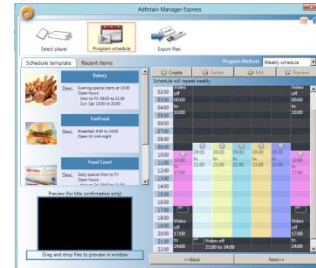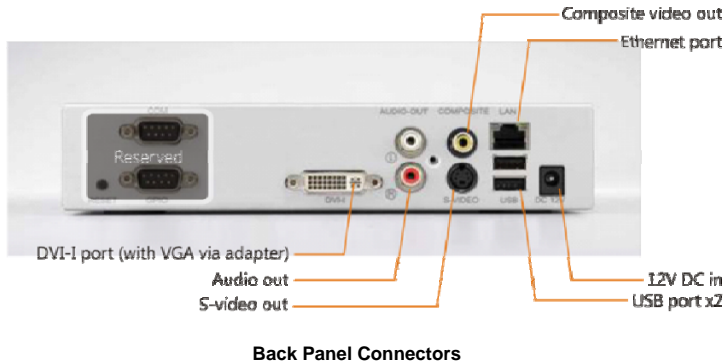

Manager Express for Generating SMIL
Supporting Microsoft PowerPoint 2007 Slide Show

Contact

Mary Meeker Design, Inc.

41911 Fifth Street, Suite 200

Temecula, CA 92590

Phone: (951) 571-3067

Email: mmeeker@marymeekerdesign.com